


PAN HEAD TAPPING SCREWS
SİLİNDİR BAŞLI SAC VİDASI (SB)
ZYLINDER-BLECHSCHRAUBEN MIT SCHLITZ

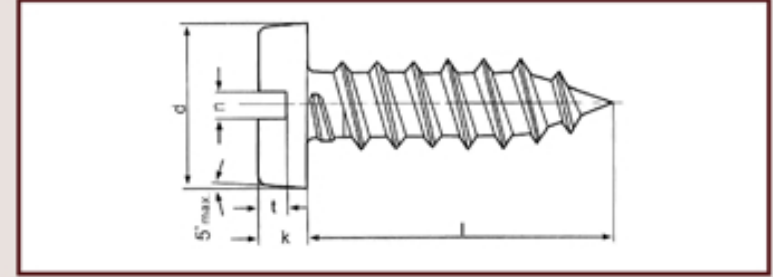

Technical informations. / Teknik bilgiler.

Thread size / Anma çapı		2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3
Head dia/Kafa çapı	d	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50
Head height/Kafa y.	k	1.35	1.75	2.10	2.25	2.45	2.80	3.20	3.65
	min.	1.15	1.50	1.85	2.00	2.15	2.50	2.85	3.30
Socket width/Yarık g,	n	0.60	0.80	1.00	1.00	1.20	1.20	1.60	1.60
Socket depth/Yarık d.	t	0.80	1.00	1.25	1.40	1.50	1.70	1.95	2.20
	min.	0.55	0.75	0.94	1.05	1.15	1.35	1.55	1.80

Values are given in millimeters. / Değerler milimetre olarak verilmiştir.

Thread size / Anma çapı	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3
Length / Boy (1)	Mass for 1.000 units in kg. / 1.000 Tanesinin ağırlığı.							
4.5	0.174							
6.5	0.214	0.424						
9.5	0.274	0.532	0.84	1.07	1.26	1.85		
13	0.344	0.658	1.02	1.29	1.50	2.20	2.95	4.32
16	0.404	0.766	1.17	1.48	1.71	2.50	3.34	4.86
19		0.874	1.32	1.67	1.92	2.80	3.73	5.40
22			1.47	1.86	2.13	3.10	4.12	5.94
25			1.62	2.05	2.34	3.40	4.51	6.48
32					2.83	4.10	5.42	7.74
38						4.70	6.20	8.82
45							7.11	10.1
50							7.76	11.0