


RAISED COUNTERSUNK HEAD TAPPING SCREWS
MERCİMEK BAŞLI SAC VİDASI (MB)
LINSENSENK-BLECHSCHRAUBEN MIT SCHLITZ

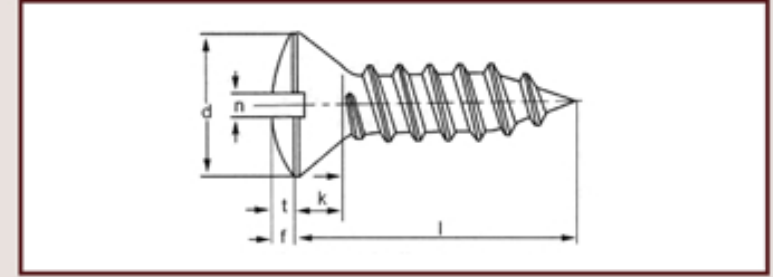

Technical informations. / Teknik bilgiler.

| Thread size / Anma çapı | | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 |
|-------------------------|------|------|------|------|------|------|------|-------|-------|
| Head dia/Kafa çapı | d | 4.30 | 5.50 | 6.80 | 7.50 | 8.10 | 9.50 | 10.80 | 12.40 |
| Head height/Kafa y. | k | 1.30 | 1.70 | 2.10 | 2.30 | 2.50 | 3.00 | 3.40 | 3.80 |
| | min. | 0.70 | 0.90 | 1.20 | 1.30 | 1.40 | 1.50 | 1.70 | 2.00 |
| Socket width/Yarık g, | n | 0.60 | 0.80 | 1.00 | 1.00 | 1.20 | 1.20 | 1.60 | 1.60 |
| Socket depth/Yarık d. | t | 1.15 | 1.50 | 1.90 | 2.05 | 2.25 | 2.60 | 2.95 | 3.45 |
| | min. | 0.95 | 1.25 | 1.55 | 1.70 | 1.85 | 2.15 | 2.45 | 2.85 |

Values are given in millimeters. / Değerler milimetre olarak verilmiştir.

| Thread size / Anma çapı | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 |
|-------------------------|---|-------|------|------|------|------|------|------|
| Length / Boy (1) | Mass for 1.000 units in kg. / 1.000 Tanesinin ağırlığı. | | | | | | | |
| 4.5 | 0.140 | | | | | | | |
| 6.5 | 0.180 | 0.332 | | | | | | |
| 9.5 | 0.240 | 0.440 | 0.72 | 0.89 | 1.07 | 1.88 | | |
| 13 | 0.310 | 0.566 | 0.90 | 1.11 | 1.32 | 2.18 | 3.12 | 4.00 |
| 16 | 0.370 | 0.674 | 1.05 | 1.30 | 1.53 | 2.48 | 3.50 | 4.54 |
| 19 | | 0.782 | 1.20 | 1.49 | 1.74 | 2.78 | 3.89 | 5.08 |
| 22 | | | 1.35 | 1.68 | 1.95 | 3.08 | 4.28 | 5.62 |
| 25 | | | 1.50 | 1.87 | 2.16 | 3.78 | 5.19 | 6.88 |
| 32 | | | | | 2.65 | 4.38 | 5.97 | 7.96 |
| 38 | | | | | | 5.08 | 6.88 | 9.24 |
| 45 | | | | | | | 7.00 | 9.50 |
| 50 | | | | | | | 7.53 | 10.1 |