


"DIN 97"

SLOTTED COUNTERSUNK HEAD WOOD SCREW HAVŞA BAŞLI DÜZ YARIKLI AĞAÇ VİDASI SENK-HOLZSCHRAUBEN MIT SCHLITZ

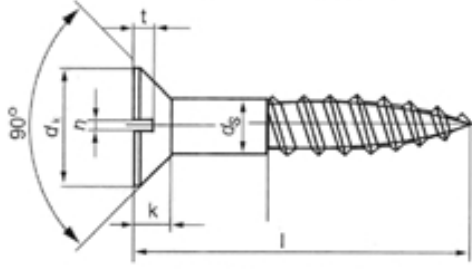

Technical informations. / Teknik bilgiler.

Thread size / Anma çapı		2	2.5	3	3.5	4	4.5	5	6	8
Wire dia/Tel çapı	min.	1.60	2.10	2.60	3.02	3.52	4.02	4.52	5.52	7.42
	d_k	3.80	4.70	5.60	6.50	7.50	8.30	9.20	11.00	14.50
Head dia /Kafa çapı	min.	3.43	4.33	5.23	6.05	7.05	7.85	8.75	10.45	13.95
	k	1.20	1.50	1.65	1.93	2.20	2.35	2.50	3.00	4.00
Head height/Kafa yük.	k	1.20	1.50	1.65	1.93	2.20	2.35	2.50	3.00	4.00
Slot width/Yarık den.	n	0.5	0.6	0.8	0.8	1.0	1.0	1.2	1.6	2.0
Slot depth/Yarık der.	t	0.4	0.5	0.6	0.7	0.8	0.9	1.0	1.2	1.6

Values are given in millimeters. / Değerler milimetre olarak verilmiştir.

Thread size / Anma çapı		2	2.5	3	3.5	4	4.5	5	6	8	
Length / Boy (1)		Mass for 1.000 units in kg. / 1.000 Tanesinin ağırlığı.									
10	+/-	0.75	0.259	0.372	0.604	0.789					
12	+/-	0.90	0.302	0.432	0.696	0.914	1.18				
16	+/-	0.90	0.387	0.552	0.881	1.170	1.49	1.85	2.31		
20	+/-	1.00	0.484	0.672	1.060	1.430	1.79	2.22	2.78	4.12	
25	+/-	1.00		0.822	1.300	1.730	2.17	2.71	3.37	4.96	
30	+/-	1.00		0.972	1.540	2.040	2.55	3.19	4.00	5.80	
35	+/-	1.25			1.770	2.350	2.94	3.68	4.55	6.63	
40	+/-	1.25			2.010	2.660	3.32	4.17	5.14	7.46	13.4
45	+/-	1.25				2.980	3.66	4.65	5.73	8.29	15.0
50	+/-	1.25				3.290	4.05	5.14	6.32	9.12	16.5
60	+/-	1.50				3.910	4.81	6.11	7.54	10.8	19.6
70	+/-	1.50							8.72	12.5	22.7
80	+/-	1.50							9.90	14.3	25.7