


# "DIN 605"

FLAT COUNTERSUNK SQUARE NECK BOLTS

BIÇAK CİVATASI

SENKŞRAUBEN MIT HOHEM VIERKANTANSATZ

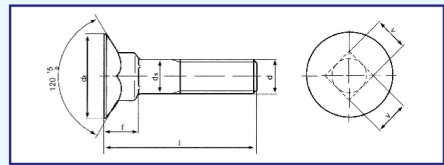

Technical informations. / Teknik bilgiler.

| Thread size / Anma çapı |                | M5   | M6   | M8   | M10  | M12  | M16  | M20  |
|-------------------------|----------------|------|------|------|------|------|------|------|
| Pitch / Diş adımı       | P              | 0.80 | 1.00 | 1.25 | 1.50 | 1.75 | 2.00 | 2.50 |
| Head height/Kafa y.     | f              | 6    | 7    | 9    | 11   | 14   | 17   | 22   |
|                         | +/-            | 0.40 | 0.45 | 0.45 | 0.45 | 0.55 | 0.55 | 0.65 |
| Head dia/Kafa çapı      | d <sub>K</sub> | 13   | 16   | 20   | 24   | 28   | 38   | 44   |
|                         | +/-            | 0.45 | 0.45 | 0.55 | 0.55 | 0.65 | 0.65 | 0.75 |
| Square width/Kafa gen.  | v              | 5    | 6    | 8    | 10   | 12   | 16   | 20   |
|                         | +/-            | 0.48 | 0.48 | 0.58 | 0.58 | 0.68 | 0.68 | 0.78 |

Values are given in millimeters. / Değerler milimetre olarak verilmiştir.

| Thread size / Anma çapı |          | M5  | M6   | M8   | M10  | M12  | M16 | M20 |
|-------------------------|----------|---|------|------|------|------|-----|-----|
| Length / Boy (1)        |          | Mass for 1.000 units in kg. / 1.000 Tanesinin ağırlığı. |      |      |      |      |     |     |
| 30                      | +/- 1.05 | 5.4   | 8.8  | 15.4 |      |      |     |     |
| 35                      | +/- 1.05 | 6.2   | 9.8  | 17.4 |      |      |     |     |
| 40                      | +/- 1.05 | 6.9   | 10.8 | 19.3 | 30.6 |      |     |     |
| 45                      | +/- 1.25 |   | 11.9 | 21.3 | 33.6 |      |     |     |
| 50                      | +/- 1.25 |   | 12.9 | 23.2 | 36.5 | 72.8 |     |     |
| 55                      | +/- 1.25 |   | 13.9 | 25.2 | 38.4 | 77.3 |     |     |
| 60                      | +/- 1.25 |   | 14.9 | 27.1 | 42.4 | 81.3 |     |     |
| 65                      | +/- 1.50 |   |      | 29.1 | 45.3 | 85.7 | 145 | 270 |
| 70                      | +/- 1.50 |   |      | 31   | 48.2 | 89.8 | 153 | 282 |
| 80                      | +/- 1.50 |   |      | 34.9 | 54.1 | 98.8 | 169 | 307 |
| 90                      | +/- 1.50 |   |      |      | 59.9 | 107  | 185 | 332 |
| 100                     | +/- 1.50 |   |      |      | 65.7 | 116  | 200 | 357 |