


"DIN 605"

FLAT COUNTERSUNK SQUARE NECK BOLTS

BIÇAK CİVATASI

SENKSCHRAUBEN MIT HOHEM VIERKANTANSATZ

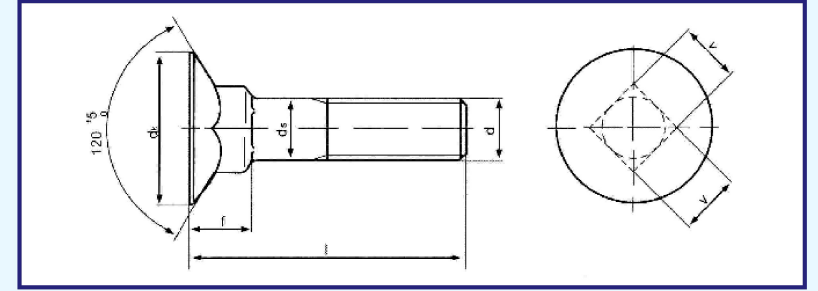

Technical informations. / Teknik bilgiler.

Thread size / Anma çapı		M5	M6	M8	M10	M12	M16	M20
Pitch / Diş adımı	P	0.80	1.00	1.25	1.50	1.75	2.00	2.50
Head height/Kafa y.	f	6	7	9	11	14	17	22
	+/-	0.40	0.45	0.45	0.45	0.55	0.55	0.65
Head dia/Kafa çapı	d_K	13	16	20	24	28	38	44
	+/-	0.45	0.45	0.55	0.55	0.65	0.65	0.75
Square width/Kafa gen.	v	5	6	8	10	12	16	20
	+/-	0.48	0.48	0.58	0.58	0.68	0.68	0.78

Values are given in milimeters. / Değerler milimetre olarak verilmiştir.

Thread size / Anma çapı			M5	M6	M8	M10	M12	M16	M20
Length / Boy (1)			Mass for 1.000 units in kg. / 1.000 Tanesinin ağırlığı.						
30	+/-	1.05	5.4	8.8	15.4				
35	+/-	1.05	6.2	9.8	17.4				
40	+/-	1.05	6.9	10.8	19.3	30.6			
45	+/-	1.25		11.9	21.3	33.6			
50	+/-	1.25		12.9	23.2	36.5	72.8		
55	+/-	1.25		13.9	25.2	38.4	77.3		
60	+/-	1.25		14.9	27.1	42.4	81.3		
65	+/-	1.50			29.1	45.3	85.7	145	270
70	+/-	1.50			31	48.2	89.8	153	282
80	+/-	1.50			34.9	54.1	98.8	169	307
90	+/-	1.50				59.9	107	185	332
100	+/-	1.50				65.7	116	200	357